

LFAR70RGBWK-G1-822-06

Product family benefits

- Uniform color changing
- Great design freedom thanks to flexibility and cuttability of module
- Simple mounting and connection
- Type of protection: IP00
- Toolless connection with the optional CONNECTsystem for RGB
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back

Areas of application


- Effect lighting in architecture
- Injection of light into displays and low-profile light guides
- Dynamic effects in public zones



LFAR70RGBWK-G1-822-06

Equipment / Accessories

- Simplified connection with optional matching CONNECTsystem for RGB
- Quick installation with optional SLIM TRACK System

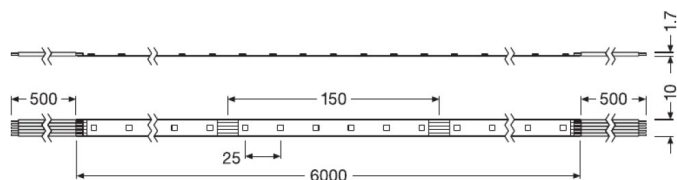

PRODUCT FEATURES

Application Features

Maximum running length	6000
LED cutting distance	150
Quick Connector	Yes
Self-adhesive	Yes
Protection Class	IP00

Technical Data

Led Type	SMD
Emission Type	TOP
Type of Current	DC
Voltage	24
LED lumen output	657 lm/m
LED efficacy	86 lm/W
LEDs per meter	480
Number of LEDs per smallest unit	12
Dimming Performance	Yes
Control Type Compatibility	DALI DMX BLUETOOTH/WIRELESS
LED life time	60000 h (hour)

Dimensions and Weight

LED Length / Roll	6000
Width	10 mm
Height	1.4 mm
Length	6000 mm
Product Weight	116 g
Quantity in package	piece roll

Application Protection Class

Indoor Lighting (Dry Area And IP Free Application)

√

Photometrical Data

Light Distribution	SYMMETRIC
Light Source Beam Angle	120
LED Colour Tone	RGBW
Standard deviation of color matching	-

Certification

Certification	CE ENEC EAC UL
Energy efficiency class	A

Colour / Tone

RGBW

√