

LFPAR20MK-G3-BL-06

Product family benefits

- Large selection of light colors
- Great design freedom thanks to flexibility and cuttability of module
- High-performance silicone for extremely long life and flexibility
- Simple connection thanks to premounted connectors
- Extraordinary design and high quality materials
- Toolless connection with the optional CONNECTsystem
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back

Areas of application


- Decorative applications
- Wall integration
- Backlighting of complex structures
- Path lighting
- Signage
- Suitable for outdoor use

Equipment / Accessories

- Simplified connection with optional matching CONNECTsystem
- Quick installation with optional SLIM TRACK System



LFPAR20MK-G3-BL-06

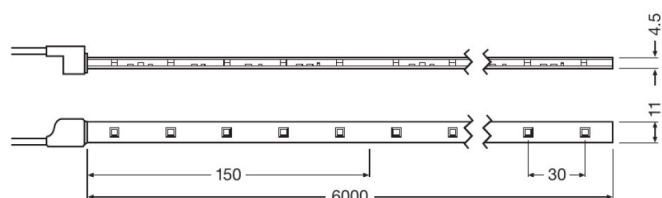

PRODUCT FEATURES

Application Features

Maximum running length	6000
LED cutting distance	150
Quick Connector	Yes
Self-adhesive	Yes
Protection Class	IP67

Technical Data

Led Type	SMD
Emission Type	TOP
Type of Current	DC
Voltage	24
LED lumen output	48 lm/m
LED efficacy	12 lm/W
LEDs per meter	33
Number of LEDs per smallest unit	5
Dimming Performance	Yes
Control Type Compatibility	ONOFF 0-10V 1-10V DALI DMX BLUETOOTH/WIRELESS
LED life time	50000 h (hour)
LED Lumen Maintenance Factor	L80B50

Dimensions and Weight

LED Length / Roll	6000
Width	11 mm
Height	4.5 mm
Length	6000 mm
Product Weight	390 g
Quantity in package	roll

Application Protection Class

Wet/Dust Area Application IP66/IP67	√
Outdoor Application With UV Resistance (IP67/IP68)	√

Photometrical Data

Light Distribution	SYMMETRIC
Light Source Beam Angle	120
LED Colour Tone	BLUE
Colour rendering index	-
Colour rendering index	-
Standard deviation of color matching	-

Certification

Certification	CE EAC UL
Energy efficiency class	A

Colour / Tone

MONOCOLOUR	√
------------	---